

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
25 September 2003 (25.09.2003)

PCT

(10) International Publication Number
WO 03/079702 A1(51) International Patent Classification⁷: **H04Q 7/20**(21) International Application Number: **PCT/SE03/00355**(22) International Filing Date: **3 March 2003 (03.03.2003)**(25) Filing Language: **English**(26) Publication Language: **English**(30) Priority Data:
0200812-6 **18 March 2002 (18.03.2002) SE**(71) Applicant (for all designated States except US): **OPTILION AB [SE/SE]; P. O. Box 47646, S-117 94 Stockholm (SE).**


(72) Inventors; and

(75) Inventors/Applicants (for US only): **HAULIN, Tord [SE/SE]; Hammarbygatan 52, S-753 24 Uppsala (SE). RÖMER, Tume [SE/SE]; Villavägen 61, S-179 33 Ekerö (SE).**(74) Agent: **BERGLUND, Stefan.; Bjerkéns Patentbyrå KB, Östermalmstorg 5, S-114 42 Stockholm (SE).**(81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.**(84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

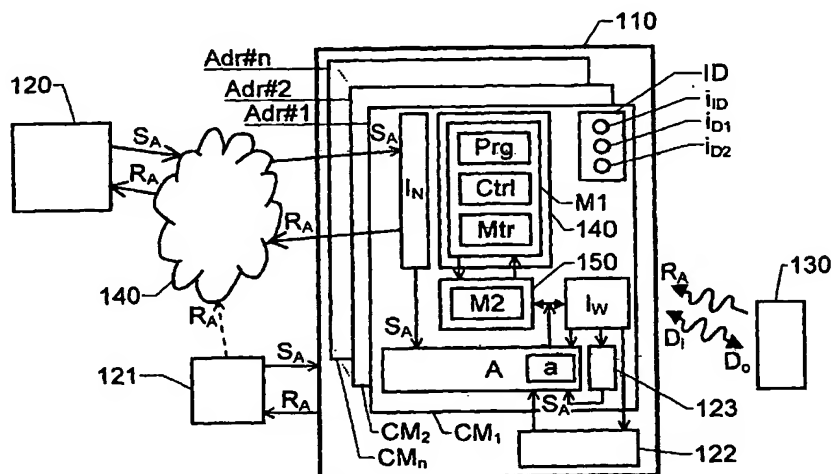(54) Title: **SERVICE AND MAINTENANCE SOLUTIONS FOR PROGRAMMABLE AND/OR RECONFIGURABLE MODULES INCLUDED IN COMMUNICATION NETWORK NODES**

(57) Abstract: The present invention relates to service and maintenance solutions for programmable and/or reconfigurable modules (CM₁, ..., CM_n), which are included in the nodes of a communications network (140). The module (CM₁), in turn, contains a first digital storage unit (M1), which holds information pertaining to the accomplishment of a primary function of the module (CM₁). A secondary function of the module (CM₁) involves control of the primary function. The module (CM₁) has an optical bi-directional interface (I_w) towards the first digital storage unit (M1). Thereby data in the first digital storage unit (M1) may be read out (D_o) to the portable software carrier unit (130). The contents of the first digital storage unit (M1) may also be updated (D_i) by means of the portable software carrier unit (130) via the optical bi-directional interface (I_w). data read-out (D_o) as well as data updating (D_i) may be accomplished independently of the primary function. Preferably, an access module (A) controls the bi-directional interface (I_w) in response to an authorization signal (S_A) from an authorization unit (120, 121, 122, 123).

Service and maintenance solutions for programmable and/or reconfigurable modules included in communication network nodes

THE BACKGROUND OF THE INVENTION AND PRIOR ART

The present invention relates generally to service and maintenance solutions for programmable and/or reconfigurable modules, which are included in nodes of a communications network. More particularly the invention relates to a communication module according to the preamble of claim 1 and a method of communicating with such a module according to claim 15. The term communication module is here understood to designate arbitrary type of unit, which is adapted to exchange information with at least one other unit over a communications network. The communication module may thus be a line card or an optoelectrical transceiver in a switch or a router as well as a general-purpose computer with networking capabilities.

Data communication equipment such as switches, routers, etc. have until recently had limited maintenance functionality. With today's high capacity networks however, maintenance and reliability are of growing importance. For instance, so-called carrier class services are offered also in data networks. These higher service levels have become cost efficient by use of new technology and methods applied to everything from components to system architecture. An important contribution to the improved reliability and availability comes from surveillance and maintenance functions in combination with modular system architectures that are reconfigurable during operation. There are two main concepts for handling maintenance and control communication between managed parts of the system and the management software. Either the management is accomplished by means of physically separated channels or the management system uses integrated virtual channels, which share the same

medium as the payload traffic. The present invention may be used both in networks having physically separated management channels and in networks with integrated virtual channels.

5 A fair amount of maintenance operations may generally be performed without manual intervention. However, addition, removal and replacement of hardware require manual operations. This is normally also true for software and firmware upgrades. Typically, there is an operator interface towards each node in a communications network. This interface allows an operator to
10 supervise and control various functions in the nodes. The operator interface can be handled via a management computer. Depending on network architecture and the node design (which may have a modular structure), the management computer is either located in a centralized location or connected at one or
15 more suitable points in a distributed system.

Management software often has both fully automatic and various forms of operator assisted operation modes. In its simplest form the management software provides a user-interface for the operator's access to information and control of the system. The
20 earlier generations of management systems for modular systems typically had a majority of their functionality located in a centralized management controller. Any removable modules in a node of a network of this type could hence only perform relatively simple management tasks, such as responding to
25 status requests and actuating simple operating mode commands. Today however, the removable modules are generally equipped with much more management, surveillance and debug functions which may be autonomous to a higher degree. Furthermore, some removable modules may be pro-
30 grammed and configured by loading new software or firmware.

The prior art includes many examples of solutions for remote control of the nodes in a network. For instance, European patent application No. 1 043 868 describes an optoelectronic network interface device, which allows reconfiguration of ports in a local

area network (LAN) in response to a control signal from a LAN-administrator, a network control center or being automated via dynamic network reconfiguration software.

5 European patent application No. 0 917 077 discloses a solution for wireless remote synchronization of data between a personal computer (PC) and a personal digital assistant (PDA). According to the document, data files may be automatically updated through a paging or a cellular digital packet data network, both in the PC and in the PDA.

10 However, the known distributed management functions for communications networks which include modular nodes may be limited by an insufficient capability of the host system management functionality, which results in that only a subset of the potentially available module functions are, in fact, available on
15 the system level. Limitations of this kind could be due to the fact that the removable modules, although they have a standardized interface and standardized physical dimensions, show considerable differences in management handling properties.

20 Moreover, there may be limitations with respect to the physical access. For example, a large and physically distributed communications network with centralized management functionality may have modular nodes, which are located in areas where the access to the management system is severely restricted, or perhaps even non-existent. Naturally, this may cause problems
25 when performing debug and repair operations that require operator access to both the management system and the module being diagnosed.

SUMMARY OF THE INVENTION

30 An object of the present invention is therefore to provide a solution for maintenance communication and software updating that alleviates the problems above and thus offers unrestricted access to the functionality of the communication module manage-

ment irrespective of the specific capabilities of the node to which a relevant communication module is connected and to what degree the management system is accessible from this node.

5 According to one aspect of the invention this object is achieved by a communication module as described initially, which is characterized in that the bi-directional interface includes at least one optical interface and is adapted to provide a local wireless access to the first digital storage unit. The local wireless access is provided independently of the communication module primary
10 function.

One important advantage accomplished by this design is that the module becomes readily accessible to a support operator, and at the same time, the measures performed with respect to the module can be carried out without influencing the operation
15 of the relevant module. The design is also advantageous with respect to security aspects, since the at least one optical interface requires a physical access to the room in which the node is located in order to manipulate the communication module. Moreover, it is often necessary to open at least one
20 equipment door to actually access the optical interface. Thus, the risk of unauthorized manipulation may be held relatively low.

Other advantages accomplished by the proposed design are related to electromagnetic interference requirements. A communication node, such as an optical transceiver, is normally
25 placed inside an electromagnetic shielded cabinet in order to protect the units therein from interference with external radio signals. Such shielding typically renders an alternative wireless access impossible, for instance by means of a radio interface.

Furthermore, a radio interface may be inappropriate because
30 applicable mechanical/physical restrictions on the communication node may not offer sufficient room for any antennas.

According to another preferred embodiment of this aspect of the invention, the bi-directional interface is adapted to allow read-

out of data from the first digital storage unit. Thus, status reports with respect to the primary function may be generated and exported via the bi-directional interface. Preferably, the first digital storage unit contains a first register, which includes status data with respect to the primary function. Moreover, the bi-directional interface is adapted to receive a request for status information and transmit a status report on basis of the request. The status report includes data from the first register, which pertains to at least one parameter of the primary function.

- 10 According to another preferred embodiment of this aspect of the invention, the bi-directional interface is adapted to allow updating of the contents of the first digital storage unit. Thereby, the primary function may conveniently be modified by means of software code, firmware code and/or control commands.
- 15 Preferably, the first digital storage unit includes a second normally volatile register, which is adapted to store information pertaining to accomplishment of the primary function. The bi-directional interface is adapted to receive at least one control command. Furthermore, the module is adapted to alter at least
- 20 one parameter in the second register pertaining to the accomplishment of the primary function on basis of the at least one control command.

According to another preferred embodiment of this aspect of the invention, the first digital storage unit includes a non-volatile

25 third register, which is adapted to store information pertaining to the accomplishment of the primary function. Moreover, the module contains a second digital storage unit, which is adapted to temporarily store updating information pertaining to the accomplishment of the primary function. The bi-directional inter-

30 face is adapted to receive at least one piece of information pertaining to accomplishment of the primary function. Additionally, the module is adapted to store the at least one piece of information in the second digital storage unit. This makes it possible to alter the contents of the third register on basis of the

35 at least one piece of information in the second digital storage

unit after reset of the module. Consequently, software and firmware upgrades for the primary function may conveniently be achieved via the bi-directional interface.

5 According to another preferred embodiment of this aspect of the invention, the bi-directional interface contains at least one optical interface, for example adapted to communicate in the infrared wavelength range. Such interface is advantageous because it provides an uncomplicated data transmission while minimizing the risk of unintentional interference with signals that
10 are handled by other units.

According to another preferred embodiment of this aspect of the invention, the communication module includes an access module, which is adapted to allow access to the first digital storage unit via the bi-directional interface. The access module
15 is controllable via an authorization unit; such that it blocks access to the first digital storage unit via the bi-directional interface at least until an authorization signal has been generated for the removable communication module by the authorization unit. An advantage attained thereby is that unau-
20 thorized access to the module via the bi-directional interface is prevented.

According to yet another preferred embodiment of this aspect of the invention, the access module contains an authentication sub-unit, which is adapted to receive a pass phrase from a
25 portable software carrier unit via the bi-directional interface. The access module blocks access to the first digital storage unit via the bi-directional interface at least until an acceptable pass phrase has been received. Thus, an advantage attained is that unauthorized access to the module is further prevented.

30 According to still another preferred embodiment of this aspect of the invention, the authorization signal includes an address field, which designates a specific module position within the node and/or the authorization signal includes a unique identifier of a

communication module. Thus, an identification unit in the communication module may indicate an active data transmission state upon reception of an authorization signal that designates the module. This is desirable because it facilitates location of the relevant module, and for instance, guides the operator when aiming the software carrier unit's interface towards the communication module. More important, however, is that the authorization signal ensures activation of the desired module only.

- 5
- 10 According to a preferred embodiment of this aspect of the invention, the identification unit includes a first optical indicator, which indicates that the bi-directional interface is open for access to the first digital storage unit. Thus, the operator person may confirm that access is granted and that he/she may proceed
- 15 with the data transmission process.

According to another aspect of the invention this object is achieved by a method of communicating with a communication module, which is removably connected to a node in a communications network. The module is presumed to be adapted to perform a primary function pertaining to an over-all operation of the module as well as a secondary function that involves control of the primary function. The method involves the following steps. First, an authorization signal is generated for the removable communication module. This signal is then received in the module. Subsequently, data is exchanged between the removable communication module and a portable software carrier unit via a bi-directional optical interface. The data includes information pertaining to accomplishment of the primary function and the exchange takes place independently of the primary function.

20

25

30

Preferably, the authorization signal includes an address field which designates a specific module position within the node and/or the authorization signal includes a unique identifier of a specific communication module. Thereby, it is made certain that

exclusively the desired module is activated by the authorization signal.

According to another preferred embodiment of this aspect of the invention, the method involves receiving a pass phrase in the communication module via the bi-directional wireless interface. Preferably, the pass phrase includes a static segment, a dynamic segment and/or a cyclic redundancy checksum. In case the pass phrase includes a dynamic segment, this is preferably calculated in the portable software carrier unit and the authorization unit respectively, and access to the first digital storage unit is only granted if there is a match between the results of these two calculations. The cyclic redundancy checksum is based on data, which is used to update the contents of the digital storage. Consequently, by means of the cyclic redundancy checksum, the integrity of the data transferred to the first digital storage unit can be guaranteed.

According to another preferred embodiment of this aspect of the invention, the method involves updating the contents of the first digital storage unit via the bi-directional interface. The updating may relate to volatile data, such as control commands, or relate to non-volatile definitions of the primary functions in the form of software or firmware code. In the former case, the method preferably involves receiving at least one control command via the bi-directional interface. Then, at least one parameter pertaining to accomplishment of the primary function is altered on basis of the at least one control command. In the latter case, the method preferably involves the following steps. First, at least one piece of information pertaining to accomplishment of the primary function is received via the bi-directional interface. Then, this information is temporarily stored in a second digital storage unit. Subsequently, the communication module is reset. Finally, the content of the first digital storage is altered on basis of the temporarily stored information.

According to another preferred embodiment of this aspect of the

invention, the method involves reading out data from the first digital storage unit via the bi-directional interface. Preferably, this is accomplished by first receiving a request for status information via the bi-directional interface, and then transmitting a status report on basis of the request. The status report here includes data pertaining to at least one parameter of the primary function.

Hence, the invention offers an efficient and reliable solution for accomplishing any kind of software and firmware upgrading in arbitrary communications network that includes modular nodes, such as a fiber optical network. Moreover, the invention provides a convenient means for monitoring the function of such nodes. The invention therefore grants a competitive edge to the vast majority of today's data communication systems.

15 BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is now to be explained more closely by means of preferred embodiments, which are disclosed as examples, and with reference to the attached drawings.

Figure 1 shows a communication module in a node of a communications network according to an embodiment of the present invention,

Figure 2 illustrates, by means of a flow diagram, a method of communicating with a communication module according to an embodiment of the invention,

Figure 3 exemplifies, by means of a first sequence diagram, a data transmission scenario between a portable software carrier unit and a communication module according to an embodiment of the invention, and

Figure 4 exemplifies, by means of second sequence diagram, a data transmission scenario between a portable software carrier unit and a communication module according to an embodiment of the invention.

DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

Figure 1 shows a communication module CM_1 , which is connected to a node 110 of a communications network 140 according to an embodiment of the present invention. A central resource 120, such as a management system server, is also connected to the network 140. In addition to the module CM_1 , the node 110 includes a plurality of similar communication modules CM_2, \dots, CM_n . Each module CM_1, \dots, CM_n is located at a module position, which is identified by means of a unique address $Adr\#1, \dots, Adr\#n$. Typically, the node 110 also contains a variety of other types of units and modules (not shown). The communication module CM_1 , in turn, contains a first sub-unit 140 including a first digital storage unit M1, a bi-directional wireless interface I_W , a network interface I_N , an access module A, a local authorization unit 123 and an identification unit ID.

The first digital storage unit M1 is adapted to hold information pertaining to accomplishment of a primary function of the communication module CM_1 , such as receiving incoming data traffic, performing switching operations and transmitting outgoing data traffic. For this purpose, the first digital storage unit M1 may contain software code, firmware code and/or control parameters. Furthermore, the contents of the first digital storage unit M1 may be modified (e.g. upgraded) D_i via the bi-directional wireless interface I_W . Thus, the primary function of the module CM_1 may be changed by altering the information in the first digital storage unit M1.

The first digital storage unit M1 in turn contains a first register Mtr, which includes status data for the primary function. Thus, status reports pertaining to parameters of the primary function may be generated on basis of the contents of the first register Mtr. The first digital storage unit M1 also contains a second and volatile register Ctrl, which is adapted to store information pertaining to the accomplishment of the module's CM_1 primary

function. Thus, parameters in the second register Ctrl, which pertain to the primary function, may be altered on basis of control commands entered via the bi-directional interface I_w . Furthermore, the first digital storage unit M1 contains a third and non-volatile register Prg, which is adapted to store information in the form of software and/or firmware that pertains to the accomplishment of the primary function.

A second digital storage unit M2 in a second sub-unit 150 of the module CM_1 is adapted to temporarily store the information pertaining to the accomplishment of the primary function, which is to be entered into the register Prg. The content of the register Prg is altered after reset of the module CM_1 , for instance in connection with a reboot or restart operation.

The communication module CM_1 is designed such that it is possible to modify the contents of the first digital storage unit M1 during operation of the module CM_1 according to the primary function. Additionally, it is possible to read out D_o the contents of the first digital storage unit M1 via the bi-directional wireless interface I_w , such that analysis and diagnosis operations can be performed for the communication module CM_1 independently of the primary function.

According to the invention, the bi-directional wireless interface I_w is adapted to provide a local wireless access to the first digital storage unit M1. In practice, this means that a portable software carrier unit 130 (for instance in the form of a personal digital assistant, a palmtop computer, a laptop computer or a mobile telephone) may wirelessly exchange information with the first digital storage unit M1. Preferably, the bi-directional wireless interface I_w includes at least one optical interface, e.g. adapted for transmission of signals in the infra red wavelength range. Thereby, the module CM_1 is capable of communicating with the majority of portable software carriers currently on the market.

The access module A has a gate function and is adapted to allow access to the first digital storage unit M1 via the bi-directional wireless interface I_W . An authorization unit controls the access module A by means of an authorization signal S_A .

5 The authorization unit may be included in the central resource 120 and transmit the authorization signal S_A to the module CM_1 via the network interface I_N . Alternatively, the authorization may be included in a first local resource 121, which is connected to the node 110 or the unit may be included in a second local

10 resource 122 within the node 110. Optionally, the authorization unit may be included in a third local resource 123 within the module CM_1 itself. Preferably, however not necessarily, the authorization unit generates the authorization signal S_A in response to an access request signal R_A from the portable

15 software carrier unit 130. Typically, the access request signal R_A is processed in the relevant authorization unit, i.e. 120, 121, 122 or 123. Nevertheless, according to one embodiment of the invention and in case the authorization unit is located in the first local resource 121, the access request signal R_A may be

20 forwarded to the central resource 120 for generation of the authorization signal S_A .

Specifically, the gate function implies that the access module A blocks any access to the first digital storage unit M1 via the bi-directional wireless interface I_W until an authorization signal S_A for the relevant module CM_1 has been received in the module

25 CM_1 . The authorization signal S_A may include an address field, which designates a specific module position, e.g., $Adr\#1$, within the node 110. Thus, the node 110 can relate a given authorization signal S_A to a certain module, say CM_1 . As an

30 alternative or a complement thereto, the authorization signal S_A may include a unique identifier (e.g. a serial number) of a certain module, such as CM_1 . Depending on the application, one or more further access conditions may need to be fulfilled before access to the first digital storage unit M1 is actually granted.

35 However, this will be discussed in further detail below, for

instance with reference to the figures 3 and 4.

According to a preferred embodiment of the invention, the network interface I_N is adapted to receive the authorization signal S_A . It is also preferable if the identification unit ID is adapted to indicate an active data transmission state i_{ID} , i.e. that an authorization signal S_A has been received for the module CM_1 .

According to a preferred embodiment of the invention, the access module A within the communication module CM_1 in turn contains an authentication sub-unit a, which is adapted to receive a pass phrase from a portable software carrier unit 130 via the bi-directional wireless interface I_W . The access module A may thereby block access to the first digital storage unit M1 via the bi-directional wireless interface I_W , until (in addition to the authorization signal S_A) an acceptable pass phrase has been received.

The pass phrase may very well be empty (or non-existent). Depending on any complementary security measures, the security levels for the pass phrase may be varied. For instance, in case the node 110 is provided with a relatively high degree of protection with respect to physical access, the requirements on the pass phrase may be released. However preferably, the pass phrase at least includes a static segment, i.e. a predetermined, permanent sequence of characters (letters, numbers or symbols). In addition, or as a complement, to the static segment, the pass phrase may include a dynamic segment, i.e. a sequence of characters (letters, numbers or symbols) which typically varies from one log-on to another. The dynamic part of the pass phrase is calculated outside of the communications module CM_1 , preferably in the portable software carrier unit 130 and the authorization unit respectively. Access to the first digital storage unit M1 is then only granted if there is a match between the results of these two calculations. The pass phrase may also include a cyclic redundancy checksum (CRC). According to a

preferred embodiment of the invention, the CRC is based on (i.e. calculated from) data D_i , which is to update the contents of the digital storage M. Consequently, the integrity of the data transferred to the first digital storage unit can be guaranteed.

- 5 Given the various types of pass phrases above, different security levels (*open*, *protected*, *closed*, *closed-confirm*) may be defined with respect to the accessibility to the first digital storage unit M1. A first security level, *open*, implies that the contents of the first digital storage unit M1 is freely accessible
10 for any kind of modification and read-out. It is worth mentioning though, that the first digital storage unit M1 may be divided into different sectors, and preferably, the sectors pertaining to comparatively critical functions of the node 110 are allocated a security level above the first security level. A second security
15 level, *protected*, implies that a static password is required in order to read out or store data in the first digital storage unit M1. This security level may hence be used to safeguard against unintentional modifications of the data therein. A third security
20 level, *closed*, implies that both a static password and a dynamic password are required to obtain access to the first digital storage unit M1. Preferably, this security level is allocated to those sectors of the first digital storage unit M1 that pertain to relatively central functions in the node 110, such as setting of control parameters and erasure of event logs. A fourth security
25 level, *closed-confirm*, implies that a valid combination of a static password, a dynamic password and a CRC must be entered. This security level is appropriate when performing software and/or firmware upgrades, since it ensures that only a specific set of data (e.g. that which has been obtained from an
30 authorized provider) can be stored into the first digital storage unit M1.

According to a preferred embodiment of the invention, the identification unit ID includes a first optical indicator i_{D1} , which indicates whenever the bi-directional interface I_w is open for
35 access to the first digital storage unit M1. For instance, a light

emitting diode (LED) may thus inform a service operator that an acceptable pass phrase has been entered. Moreover, it is preferable if the identification unit ID contains a second optical indicator i_{D2} , which indicates that data D_i or D_o is being transmitted over the bi-directional wireless interface I_W . The service operator may thereby obtain additional useful information, such as when a particular download has been completed.

Instead of providing a separate first optical indicator i_{D1} and second optical indicator i_{D2} , these indicators may be combined into a single optical indicator, which has two distinctive signaling behaviors. Moreover, this indicator is preferably adapted to indicate an active data transmission state i_{ID} in response to an authorization signal having been received with respect to the communication module, i.e. a third distinctive signal.

A method of communicating with a communication module according to an embodiment of the invention will now be described with reference to figure 2. A first step 210, investigates whether an authorization signal has been generated with respect to a relevant communication module, and if so the procedure continues to a step 220. Otherwise, the procedure loops back and stays in the step 210. The step 220 starts a first timer having a relatively long duration. The first timer has the function of releasing the access to the communication module, typically after a completed data transfer, however also after a predetermined period of inactivity. Next, a step 225 indicates an active data transmission state i_{ID} , i.e. that an authorization signal has been generated for the communication module in question.

Subsequently, a step 230 investigates whether an acceptable pass phrase has been received via the bi-directional interface, for example from a portable software carrier unit. As already mentioned, this step is optional, which means that the pass phrase may be empty (see e.g. the first security level above). In case the condition checked in step 230 is not fulfilled, a step 240 investigates whether the first timer has expired, and if so

the procedure loops back to the step 210. Otherwise, the procedure stays in the step 230 to 240 loop until an acceptable pass phrase is received or the first timer expires. In the first case, a step 250 starts a second timer (having a relatively short duration). The purpose of the second timer is to limit the period between the entry of a valid pass phrase and initiating data transmission. The second timer also initiates the turn-off process for the bi-directional wireless interface after a completed data transmission. Next, a step 251 activates an indication signal i_{D1} indicating that the bi-directional wireless interface is open for access to the first digital storage unit. Afterwards, a step 252 restarts the first timer.

Following step 252, a step 260 investigates whether data is being transmitted over the interface, and if this is not the case, a step 270 investigates whether the second timer has expired. An affirmative answer here results in that the procedure loops back to the step 230, where the user is prompted to re-enter a valid pass phrase. If, however, the question posed in step 260 is answered affirmative, a step 280 restarts the second timer. Subsequently, a step 285 indicates that data is currently being transmitted, for instance via a particular LED-signal. Thereafter, the procedure returns to step 260 again.

According to alternative embodiments of the invention, two or more of the process steps described above may be executed in parallel or in mutually reversed order. Specifically, this is true with respect to the sub-sequences of steps 220 and 225, 250 – 252 respective 280 and 285.

Furthermore, all of the process steps, as well as any sub-sequence of steps, described with reference to the figure 2 above may be controlled by means of a computer program being directly loadable into the internal memory of a computer, which includes appropriate software for controlling the necessary steps when the program is run on a computer. Furthermore, such computer programs can be recorded onto arbitrary kind of

computer readable medium as well as be transmitted over arbitrary type of network and transmission medium.

Figure 3 exemplifies, by means of a first sequence diagram, a data transmission scenario between a portable software carrier unit 130 and a communication module CM_1 according to an embodiment of the invention.

First, an access request signal R_A is sent out by the portable software carrier unit 130. This signal R_A is received by the node 110 and forwarded to a relevant authorization unit 12x. Provided that the access request signal R_A is accepted, an authorization signal $S_A(F_{\text{Adr}\#1})$ is generated with respect to the communication module CM_1 . Here, an address field $F_{\text{Adr}\#1}$ in authorization signal $S_A(F_{\text{Adr}\#1})$ designates a module position $\text{Adr}\#1$ at which the communication module CM_1 is located within a particular node.

The module CM_1 then indicates i_{ID} an active data transmission state, for example by lightning a first LED in its identification unit ID. A service operator is prompted to enter a pass phrase $PW(pw_s)$ via the portable software carrier unit 130. For example, the pass phrase $PW(pw_s)$ includes a static segment pw_s . However in the general case, the pass phrase $PW(pw_s)$ is optional and may thus be left out. Subsequently, an open bi-directional wireless interface is indicated i_{D1} , for instance by lightning a second LED in the identification unit ID. Next, data is transmitted. Here, the data is read out D_o from the module's CM_1 first digital storage unit to the portable software carrier unit 130. In parallel with this, an optical indicator i_{D2} , such as a third LED in the identification unit ID, is activated.

Figure 4 exemplifies, by means of second sequence diagram, another data transmission scenario between the portable software carrier unit 130 and a communication module CM_1 according to an embodiment of the invention.

Again, an access request signal R_A is initially sent out by the portable software carrier unit 130. The access request signal R_A

is received by the module CM_1 and forwarded to a relevant authorization unit 12x, external or internal. This unit 12x then generates an authorization signal $S_A(ID_1)$, which designates ID_1 the module CM_1 . In response to the authorization signal $S_A(ID_1)$,
5 the module indicates i_{ID} an active data transmission state.

Next, the service operator enters a pass phrase $PW(pw_s, pw_D, CRC)$, preferably via the portable software carrier 130. The pass phrase $PW(pw_s, pw_D, CRC)$ includes a static segment pw_s , a dynamic segment pw_D , and a cyclic redundancy checksum CRC .
10 Then, an open bi-directional wireless interface is indicated i_{D1} . Subsequently, data transmission may be initiated. In this case, data D_i is transmitted from the portable software carrier unit 130 and stored into the module's CM_1 first digital storage unit. The ongoing data transfer is indicated by means of an optical
15 indicator i_{D2} .

The term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components. However, the term does not preclude the presence or addition of one or more additional features,
20 integers, steps or components or groups thereof.

The invention is not restricted to the described embodiments in the figures, but may be varied freely within the scope of the claims.

Claims

1. A communication module (CM_1) adapted to be removably connected to a node (110) in a communications network (140), the module (CM_1) being adapted to perform a primary function
5 pertaining to an over-all operation of the module (CM_1) and a secondary function involving control of the primary function, comprising
a first digital storage unit (M1) adapted to hold information pertaining to accomplishment of the primary function, and
10 a bi-directional interface (I_W) towards the first digital storage unit (M1),
characterized in that the bi-directional interface (I_W) comprises at least one optical interface and is adapted to provide a local wireless access to the first digital storage unit (M1), the local
15 wireless access being provided independently of the primary function.
2. A communication module (CM_1) according to claim 1,
characterized in that the bi-directional interface (I_W) is adapted to allow read out (D_o) of data from the first digital storage unit
20 (M1).
3. A communication module (CM_1) according to any one of the claims 1 or 2, **characterized in that** the bi-directional interface (I_W) is adapted to allow updating (D_i) of the contents of the first digital storage unit (M1).
- 25 4. A communication module (CM_1) according to any one of the claims 2 or 3, **characterized in that** the first digital storage unit (M1) comprises a first register (Mtr) including status data with respect to the primary function, and the bi-directional interface (I_W) is adapted to
30 receive a request for status information, and
transmit a status report on basis of the request, the status report including data from the first register (Mtr) which pertains

to at least one parameter of the primary function.

5. A communication module (CM_1) according to any one of the claims 3 or 4, **characterized in that**
the first digital storage unit (M1) comprises a second and
5 volatile register (Ctrl) adapted to store information pertaining to the accomplishment of the primary function,
the bi-directional interface (I_W) is adapted to receive at least one control command, and
it is adapted to alter at least one parameter in the second
10 register (Ctrl) pertaining to the accomplishment of the primary function on basis of the at least one control command.
6. A communication module (CM_1) according to any one of the claims 3 - 5, **characterized in that**
it comprises a second digital storage unit (M2) adapted to
15 temporarily store information pertaining to the accomplishment of the primary function,
the first digital storage unit (M1) comprises a third and non-volatile register (Prg) adapted to store information pertaining to the accomplishment of the primary function,
20 the bi-directional interface (I_W) is adapted to receive at least one piece of information pertaining to the accomplishment of the primary function, and
it is adapted to store the at least one piece of information in the second digital storage unit (M2).
- 25 7. A communication module (CM_1) according to claim 6, **characterized in that** it is adapted to, after reset of the module (CM_1), alter the contents of the third register (Prg) on basis of the at least one piece of information in the second digital storage unit (M2).
- 30 8. A communication module (CM_1) according to any one of the preceding claims, **characterized in that** it comprises an

access module (A) adapted to allow access to the first digital storage unit (M1) via the bi-directional interface (I_W), the access module (A) being controllable via an authorization unit (120, 121, 122; 123) such that the access module (A) blocks access to the first digital storage unit (M1) via the bi-directional interface (I_W) at least until an authorization signal (S_A) has been generated by the authorization unit (120, 121, 122; 123) with respect to the module (CM_1).

9. A communication module (CM_1) according to claim 8, characterized in that the access module (A) comprises an authorization sub-unit (a) adapted to receive a pass phrase (PW) from a portable software carrier unit (130) via the bi-directional interface (I_W), the access module (A) blocking access to the first digital storage unit (M1) via the bi-directional interface (I_W) at least until an acceptable pass phrase (PW) has been received.

10. A communication module (CM_1) according to any one of the claims 8 or 9, characterized in that the authorization signal ($S_A(F_{\text{Adr}\#1})$) includes an address field ($F_{\text{Adr}\#1}$) which designates a specific module position ($\text{Adr}\#1, \dots, \text{Adr}\#n$) within the node (110).

11. A communication module (CM_1) according to any one of the claims 8 - 10, characterized in that the authorization signal ($S_A(ID_1)$) includes a unique identifier (ID_1) of the module (CM_1)

12. A communication module (CM_1) according to any one of the claims 10 or 11, characterized in that it comprises an identification unit (ID) adapted to indicate an active data transmission state (i_{ID}) upon reception of an authorization signal (S_A) which designates the communication module (CM_1).

13. A communication module (CM_1) according to claim 12, **characterized in that** the identification unit (ID) comprises a first optical indicator (i_{D1}) indicative of the bi-directional interface (I_W) being open for access to the first digital storage unit (M1).
14. A communication module (CM_1) according to any one of the claims 12 or 13, **characterized in that** the identification unit (ID) comprises a second optical indicator (i_{D2}) indicative of data (D_i ; D_o) being transmitted over the bi-directional interface (I_W).
15. A method of communicating with a communication module (CM_1) being removably connected to a node (110) in a communications network (140), the module (CM_1) being adapted to perform a primary function pertaining to an over-all operation of the module (CM_1) and a secondary function involving control of the primary function, the method comprising
- generating an authorization signal (S_A) for the module (CM_1),
 - receiving the authorization signal (S_A) in the module (CM_1),
 - and
 - exchanging data (D_i ; D_o) between the module (CM_1) and a portable software carrier unit (130) via a bi-directional optical interface (I_W), the data including information pertaining to accomplishment of the primary function and being exchanged independently of the primary function.
16. A method according to claim 15, **characterized by** the authorization signal ($S_A(F_{\text{Adr}\#1})$) including an address field ($F_{\text{Adr}\#1}$) which designates a specific module position ($\text{Adr}\#1, \dots, \text{Adr}\#n$) within the node (110).
17. A method according to any one of the claims 15 or 16, **characterized by** the authorization signal ($S_A(ID_1)$) including a unique identifier (ID_1) of the module (CM_1)

18. A method according to any one of the claims 15 - 17, **characterized by** receiving a pass phrase (PW) in the communication module (CM₁), the pass phrase (PW) being received via the bi-directional optical interface (I_w).
- 5 19. A method according to claim 18, **characterized by** the pass phrase (PW) including a static segment (pw_s).
20. A method according to any one of the claims 18 or 19, **characterized by** the pass phrase (PW) including a dynamic segment (pw_D), the method comprising calculating the dynamic
10 segment (pw_D) in the portable software carrier unit (130) and a central resource (120) respectively.
21. A method according to any one of the claims 18 - 20, **characterized by** the pass phrase (PW) including a cyclic redundancy checksum (CRC), the cyclic redundancy checksum
15 (CRC) being based on data (D_i) which is to update the contents of the first digital storage (M1).
22. A method according to any one of the claims 15 - 21, **characterized by** updating (D_i) of the contents of the first digital storage unit (M1) via the bi-directional interface (I_w).
- 20 23. A method according to claim 22, **characterized by**
receiving at least one control command via the bi-directional interface (I_w), and
altering at least one parameter pertaining to the accomplishment of the primary function on basis of the at least one
25 control command.
24. A method according to any one of the claims 22 or 23, **characterized by** the steps of:
receiving at least one piece of information pertaining to the

accomplishment of the primary function via the bi-directional interface (I_W),

storing temporarily the at least one piece of information in a second digital storage unit (M_2),

- 5 resetting the communication module (CM_1), and
 altering the contents of the first digital storage (M_1) on basis of the at least one piece of information.

25. A method according to any one of the claims 15 - 24,
10 **characterized by** reading out (D_o) data from the first digital storage unit (M_1) via the bi-directional interface (I_W).

26. A method according to claim 25, **characterized by**
 receiving a request for status information via the bi-directional interface (I_W), and
15 transmitting a status report on basis of the request, the status report including data pertaining to at least one parameter of the primary function.

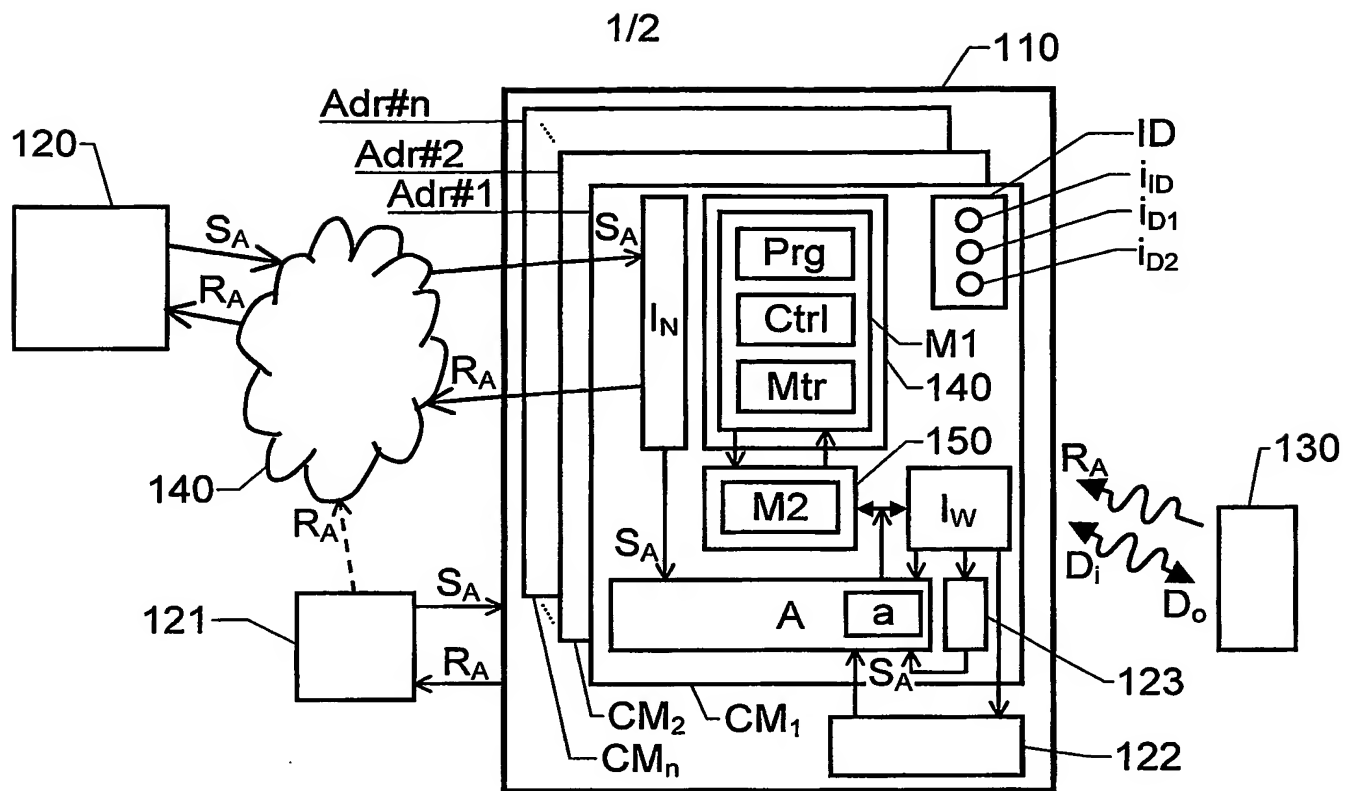


Fig. 1

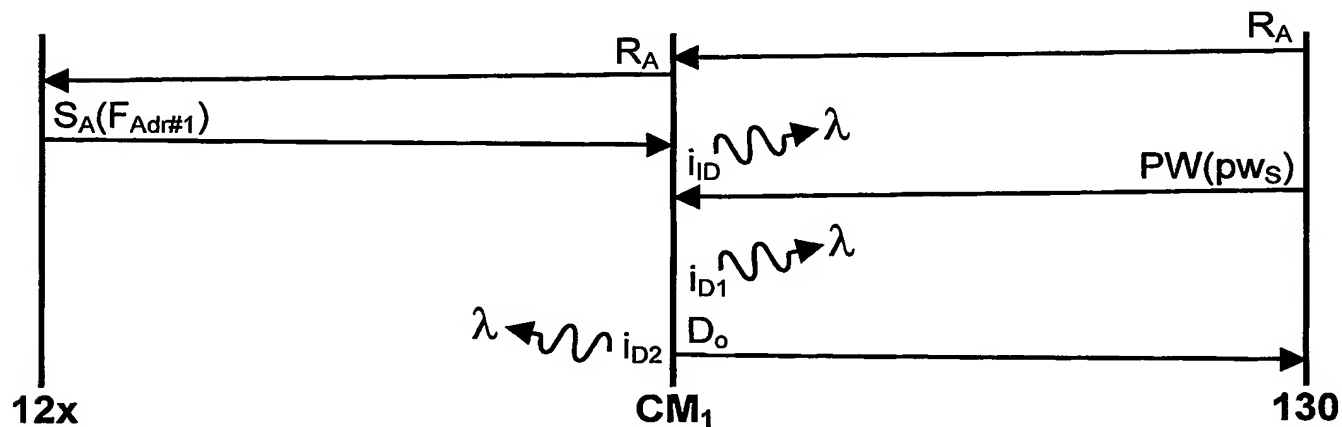


Fig. 3

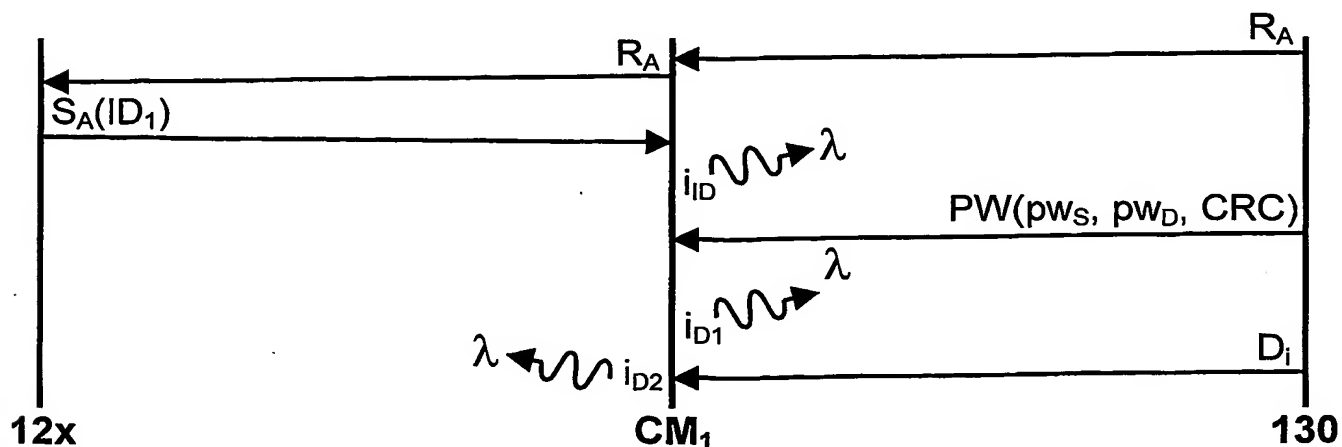


Fig. 4

2/2

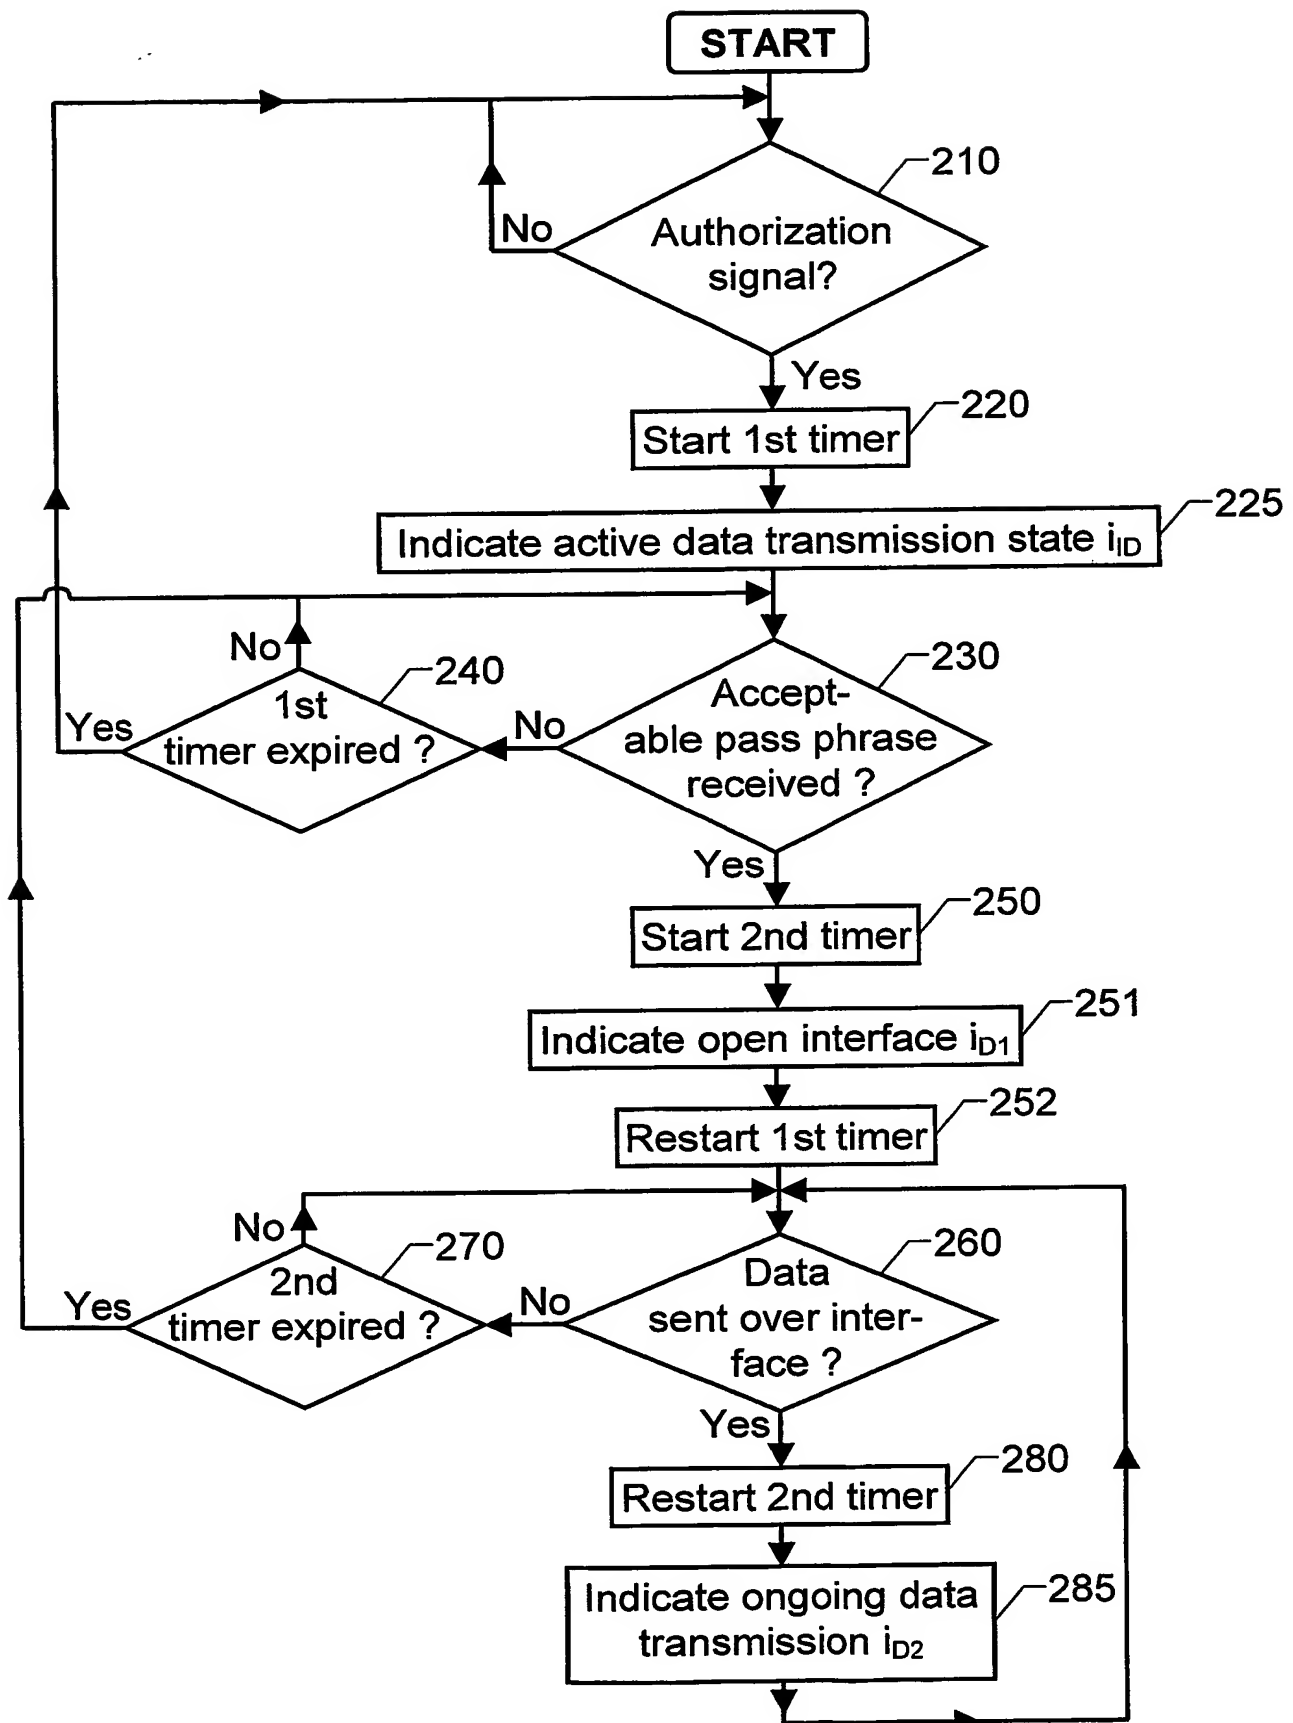


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00355

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5524135 A (MIZIKOVSKY, S. ET AL), 4 June 1996 (04.06.96), column 3, line 1 - line 67, figure 2 --	1-26
A	US 5974312 A (HAYES, JR. J.J. ET AL), 26 October 1999 (26.10.99), column 2, line 18 - column 3, line 18, figure 5A --	1-26
A	US 5815732 A (COOPER, G.N. ET AL), 29 Sept 1998 (29.09.98), figure 1, abstract --	1-26
A	WO 0159622 A2 (SONY CORPORATION OF AMERICA), 16 August 2001 (16.08.01), figures 1,2, abstract --	1-26

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but, cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 May 2003

Date of mailing of the international search report

06-06-2003

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Stefan Hansson /OGU
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00355

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 0169888 A1 (AETHER SYSTEMS, INC.), 20 Sept 2001 (20.09.01), page 3, line 12 - page 4, line 29 --	1-26
A	WO 0217098 A1 (UNIWIS CO., LTD), 28 February 2002 (28.02.02), abstract -- -----	1-27

INTERNATIONAL SEARCH REPORT
Information on patent family members

29/04/03

International application No.

PCT/SE 03/00355

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	5524135	A	04/06/96	CN	1071532 B	19/09/01
				CN	1120295 A	10/04/96
				JP	7274245 A	20/10/95
US	5974312	A	26/10/99	AU	752584 B	26/09/02
				AU	7985598 A	08/02/99
				BR	9810583 A	05/09/00
				CN	1269951 T	11/10/00
				EE	200000021 A	16/10/00
				EP	0995326 A	26/04/00
				JP	2001510315 T	31/07/01
				WO	9903288 A	21/01/99
US	5815732	A	29/09/98	NONE		
WO	0159622	A2	16/08/01	AU	2293401 A	20/08/01
				AU	2457801 A	20/08/01
				AU	2601001 A	20/08/01
				AU	3807301 A	20/08/01
				WO	0159551 A	16/08/01
				WO	0159572 A	16/08/01
				WO	0159651 A	16/08/01
				AU	2632501 A	20/08/01
				WO	0159702 A	16/08/01
WO	0169888	A1	20/09/01	AU	1495501 A	24/09/01
WO	0217098	A1	28/02/02	AU	7582701 A	04/03/02
				KR	2000063802 A	06/11/00

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
25 September 2003 (25.09.2003)

PCT

(10) International Publication Number
WO 03/079702 A1(51) International Patent Classification⁷: H04Q 7/20

(21) International Application Number: PCT/SE03/00355

(22) International Filing Date: 3 March 2003 (03.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0200812-6 18 March 2002 (18.03.2002) SE

(71) Applicant (for all designated States except US): OPTILION AB [SE/SE]; P. O. Box 47646, S-117 94 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HAULIN, Tord [SE/SE]; Hammarbygatan 52, S-753 24 Uppsala (SE). RÖMER, Tume [SE/SE]; Villavägen 61, S-179 33 Ekerö (SE).

(74) Agent: BERGLUND, Stefan.; Bjerkéns Patentbyrå KB, Östermalmstorg 5, S-114 42 Stockholm (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SERVICE AND MAINTENANCE SOLUTIONS FOR PROGRAMMABLE AND/OR RECONFIGURABLE MODULES INCLUDED IN COMMUNICATION NETWORK NODES

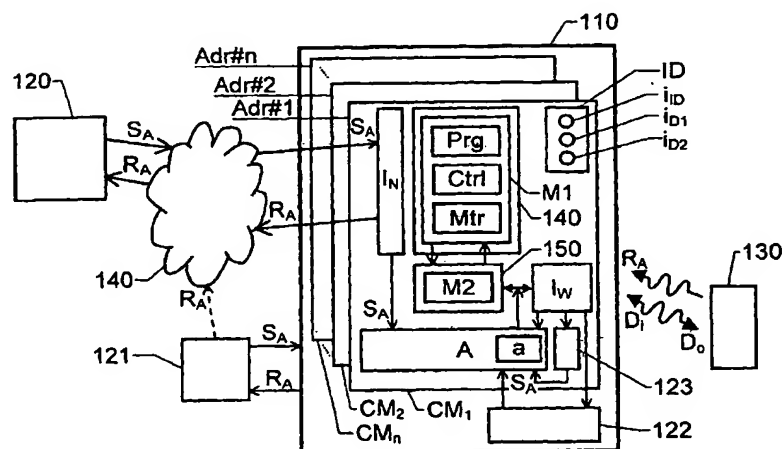

(57) Abstract: The present invention relates to service and maintenance solutions for programmable and/or reconfigurable modules (CM₁, ..., CM_n), which are included in the nodes of a communications network (140). The module (CM₁), in turn, contains a first digital storage unit (M1), which holds information pertaining to the accomplishment of a primary function of the module (CM₁). A secondary function of the module (CM₁) involves control of the primary function. The module (CM₁) has an optical bi-directional interface (I_w) towards the first digital storage unit (M1). Thereby data in the first digital storage unit (M1) may be read out (D_o) to the portable software carrier unit (130). The contents of the first digital storage unit (M1) may also be updated (D_i) by means of the portable software carrier unit (130) via the optical bi-directional interface (I_w). data read-out (D_o) as well as data updating (D_i) may be accomplished independently of the primary function. Preferably, an access module (A) controls the bi-directional interface (I_w) in response to an authorization signal (S_A) from an authorization unit (120, 121, 122, 123).

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00355

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5524135 A (MIZIKOVSKY, S. ET AL), 4 June 1996 (04.06.96), column 3, line 1 - line 67, figure 2 --	1-26
A	US 5974312 A (HAYES, JR. J.J. ET AL), 26 October 1999 (26.10.99), column 2, line 18 - column 3, line 18, figure 5A --	1-26
A	US 5815732 A (COOPER, G.N. ET AL), 29 Sept 1998 (29.09.98), figure 1, abstract --	1-26
A	WO 0159622 A2 (SONY CORPORATION OF AMERICA), 16 August 2001 (16.08.01), figures 1,2, abstract --	1-26

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but, cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 May 2003

Date of mailing of the international search report

06-06-2003

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Stefan Hansson /OGU
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00355

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 0169888 A1 (AETHER SYSTEMS, INC.), 20 Sept 2001 (20.09.01), page 3, line 12 - page 4, line 29 --	1-26
A	WO 0217098 A1 (UNIWIS CO., LTD), 28 February 2002 (28.02.02), abstract -- -----	1-27

INTERNATIONAL SEARCH REPORT
Information on patent family members

29/04/03

International application No.
PCT/SE 03/00355

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	5524135	A	04/06/96	CN	1071532 B	19/09/01
				CN	1120295 A	10/04/96
				JP	7274245 A	20/10/95

US	5974312	A	26/10/99	AU	752584 B	26/09/02
				AU	7985598 A	08/02/99
				BR	9810583 A	05/09/00
				CN	1269951 T	11/10/00
				EE	200000021 A	16/10/00
				EP	0995326 A	26/04/00
				JP	2001510315 T	31/07/01
				WO	9903288 A	21/01/99

US	5815732	A	29/09/98	NONE		

WO	0159622	A2	16/08/01	AU	2293401 A	20/08/01
				AU	2457801 A	20/08/01
				AU	2601001 A	20/08/01
				AU	3807301 A	20/08/01
				WO	0159551 A	16/08/01
				WO	0159572 A	16/08/01
				WO	0159651 A	16/08/01
				AU	2632501 A	20/08/01
				WO	0159702 A	16/08/01

WO	0169888	A1	20/09/01	AU	1495501 A	24/09/01

WO	0217098	A1	28/02/02	AU	7582701 A	04/03/02
				KR	2000063802 A	06/11/00
